

- when it has to be **right**



Leica Geosystems

How to use Leica mySecurity



Contents

1. Introduction.....	2
2. Adding the product to myWorld.....	2
3. Activating mySecurity	3
4. FlexField Status Info	6
5. Report as Stolen	7
6. Locate stolen instrument.....	8

1. Introduction

This document describes how to activate mySecurity on a Flexline TS03/07 instrument.

mySecurity is a unique cloud-based theft protection provided by Leica Geosystems.

mySecurity gives you total peace of mind if your instrument is ever stolen. A locking mechanism is available to ensure that the device is disabled and can no longer be used.

All Flexline users can activate this feature within the Leica customer portal - **myWorld**.

2. Adding the product to myWorld

First, register your Flexline Total Station within myWorld - myProducts.

Only products that are available in myWorld - myProducts can be added to mySecurity.

Then go to myTrusted Services - mySecurity.

myApplications > myTrustedServices > **mySecurity**

My Security



Leica Geosystems - mySecurity

Help

Leica Geosystems mySecurity delivers you total peace-of-mind in knowing that if your instrument is ever stolen, a locking mechanism is available to ensure that the instrument is disabled and can no longer be used.


	Product	Serial No.	My Reference	Activated	Renewal	Stolen
	TS09ultra, 2" r.tot.st.,2 full keyb	1300009				
	TS16 I R1000, basic total st.	3013446		06.02.2019	06.02.2020	
	TS07 3" R1000, total station	3301194				


Details


Remove

Add

For each product available on the list, the Activation & Renewal date is displayed, and the Stolen status, in case of the instrument has been flagged as stolen.

Press  to add a new product to mySecurity.

Press  to delete one product from mySecurity.

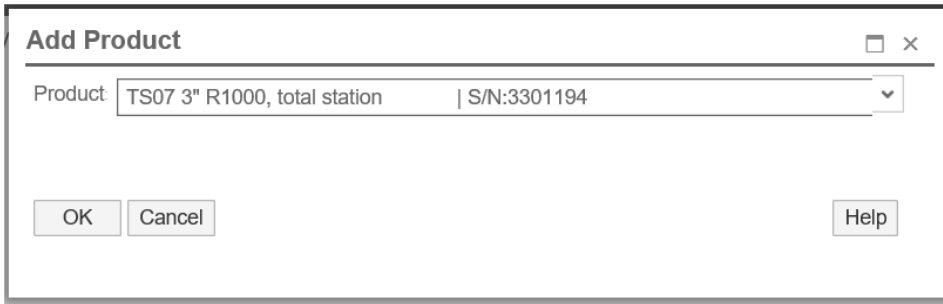


The 'Add Product' dialog box has a title bar with a close button. It contains a 'Product' label followed by a text field showing 'TS07 3" R1000, total station' and a dropdown arrow. Below the text field is a label 'S/N:3301194'. At the bottom, there are three buttons: 'OK', 'Cancel', and 'Help'.

Click **OK** to accept.


3. Activating mySecurity

The instrument needs to be connected to the PC via USB or serial cable.

Select your instrument and press 

After pressing the “Details” button, next screen will be displayed:

myApplications > myTrustedServices > **mySecurity**

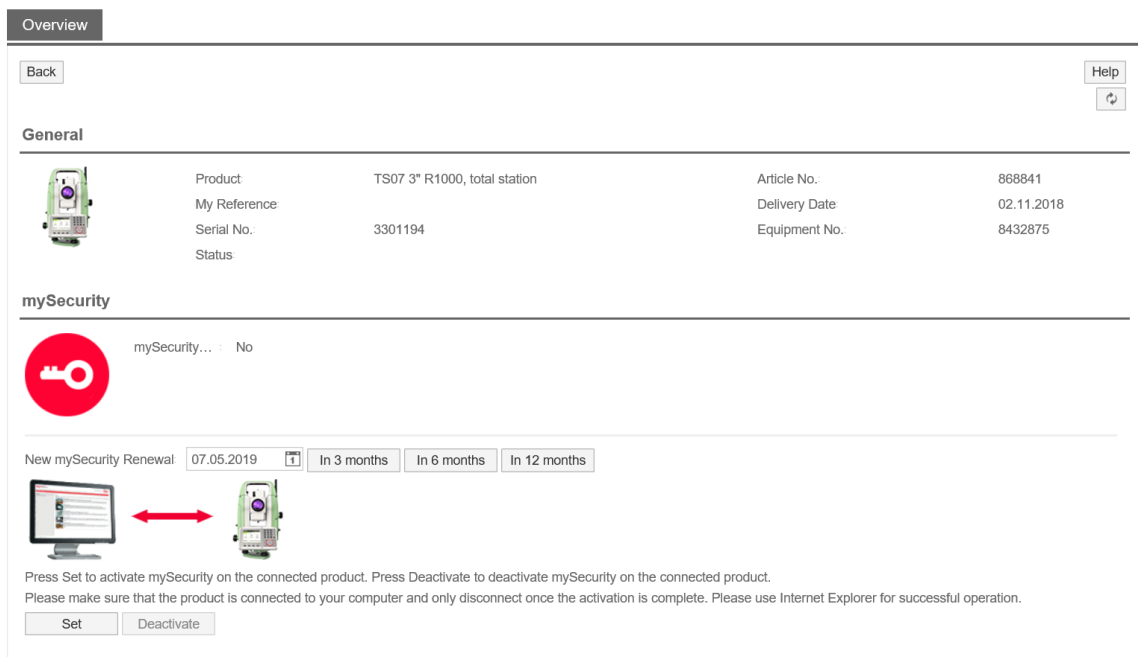


The 'mySecurity Overview' screen has a 'Back' button and a 'Help' button. It features a 'General' section with a product image and a table of details:

Product	TS07 3" R1000, total station	Article No.:	868841
My Reference:		Delivery Date	02.11.2018
Serial No.:	3301194	Equipment No.:	8432875
Status:			

Below the 'General' section is the 'mySecurity' section, which includes a red key icon and the text 'mySecurity... : No'. It also shows a 'New mySecurity Renewal' date of '07.05.2019' with buttons for 'In 3 months', 'In 6 months', and 'In 12 months'. A diagram shows a computer monitor and a surveying instrument connected by a double-headed red arrow. At the bottom, there is a paragraph of instructions and two buttons: 'Set' and 'Deactivate'.

In section **mySecurity**, the status is disabled. To activate it, the user must define a connection interval to myWorld e.g. every 3, 6 or 12 months.


Press  once **mySecurity renewal** has been selected.

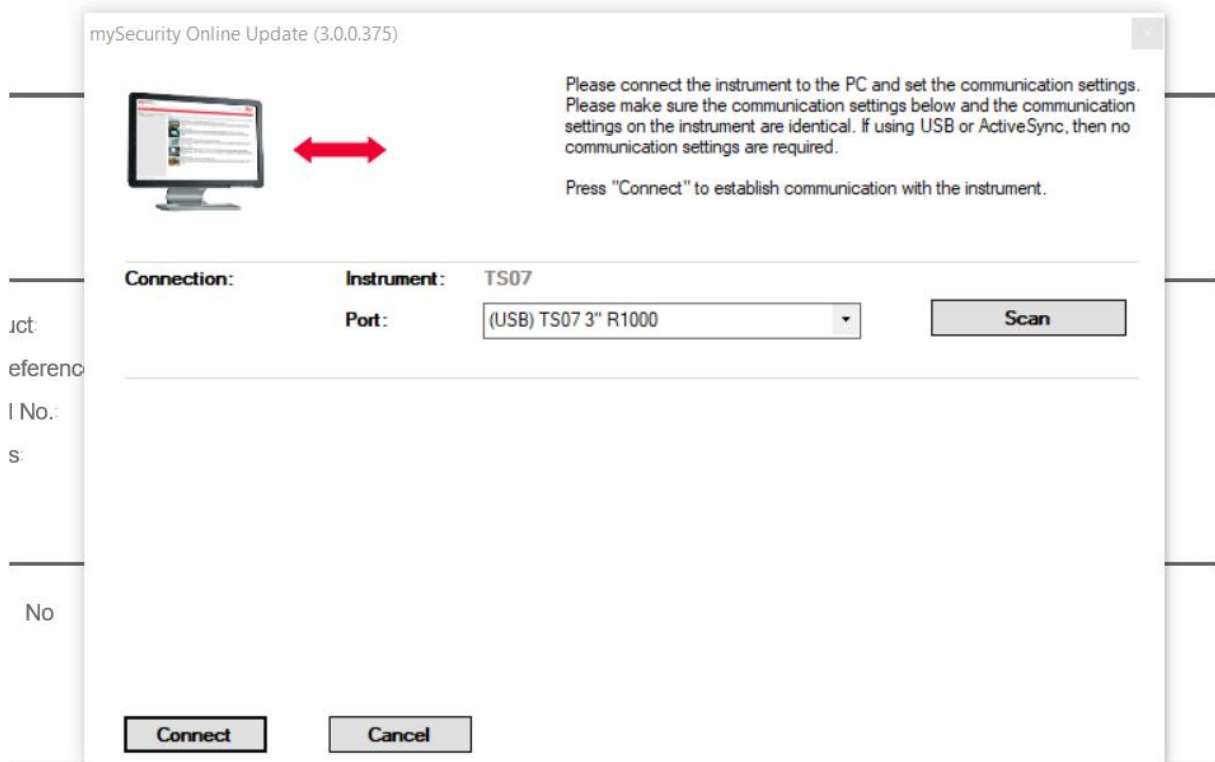

Note:

- An installation program may be downloaded and installed on your computer automatically.
- The software, automatically scans all the connection ports, in order to detect which port the instrument is connected.
- Users can manually scan, in case the automatic scan is not successful, pressing "Scan" button.
- Connection settings can be selected by user, or set it by default, pressing "Defaults" button.
- Additionally, an information message will be displayed on the Total station informing if the "mySecurity" protection has been enabled/extended/disabled

After pressing "Connect", picture below will be displayed.

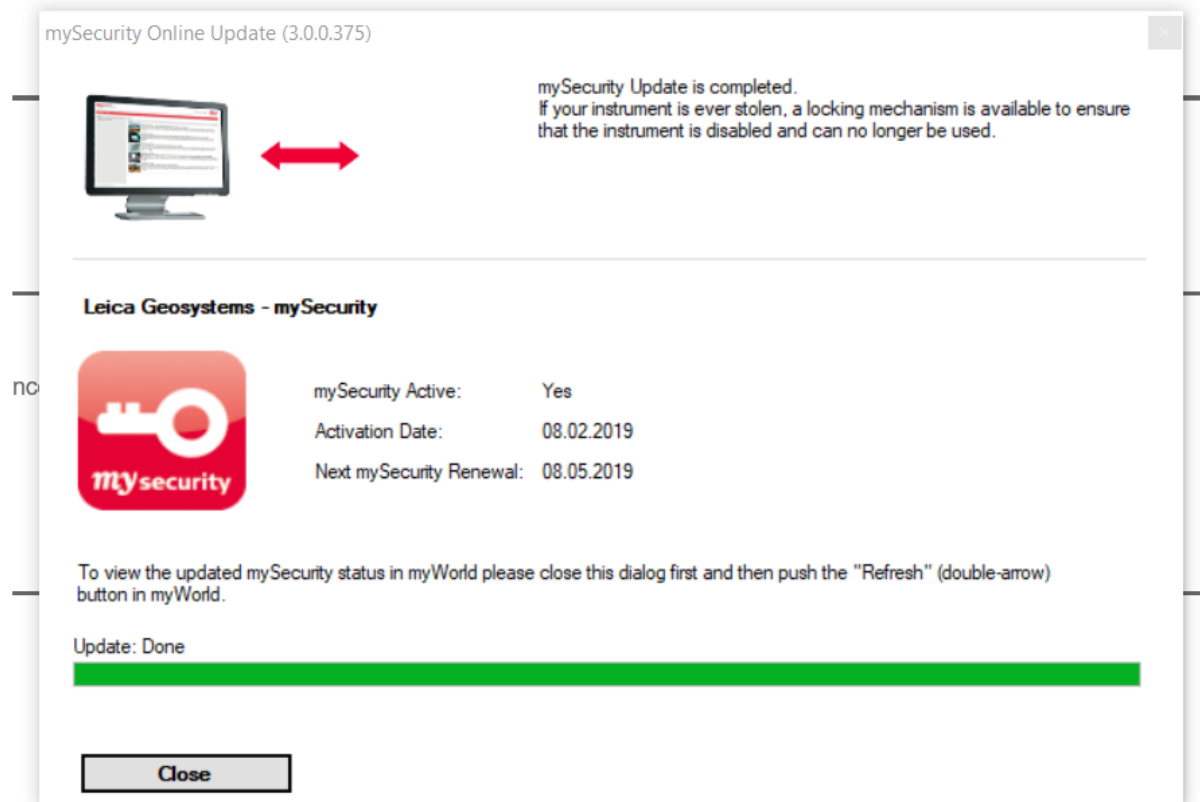

Press "Close".


Automatically the program will lead us to overview screen. Press  button to update mySecurity information.



If the instrument is not re-connected on time (or before) to myWorld the instrument gets blocked and cannot be used anymore unless it is connected to myWorld to repeat this procedure to set a new mySecurity renewal date.

4. FlexField Status Info

On the Flexline instrument, go to Tools – Info – Page 5 to check **mySecurity Renewal Date**.

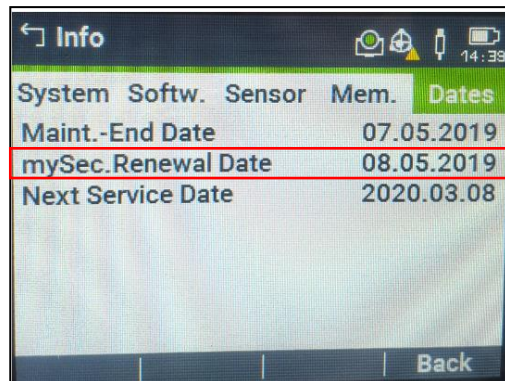


The screenshot shows the 'Info' screen with a 'Dates' tab selected. The table below is visible on the screen:

System	Softw.	Sensor	Mem.	Dates
Maint.-End Date				07.05.2019
mySec.Renewal Date				08.05.2019
Next Service Date				2020.03.08


A red box highlights the 'mySec.Renewal Date' row. The 'Back' button is at the bottom right.

Up until this date the instrument needs to be re-connected to the myWorld portal to renew the mySecurity date.

During start up, a certain time before the renewal date is due, the following message will pop up:

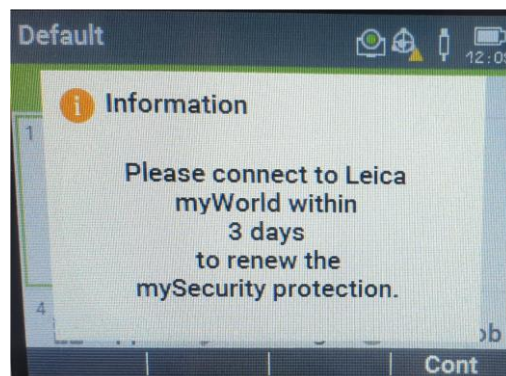

When the number of remaining days has been exceeded, the next message will pop up:

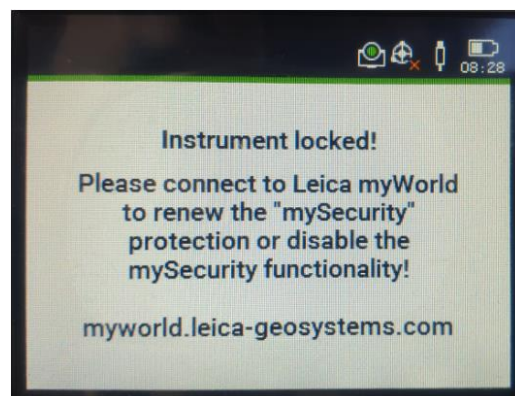

5. Report as Stolen

In mySecurity, an instrument can be reported as Stolen.

Overview

Back Help

General

	Product	TS07 3" R1000, total station	Article No.	868841
	My Reference		Delivery Date	07.02.2019
	Serial No.	3301194	Equipment No.	8432875
	Status		Report as...	

mySecurity

 mySecurity... : Yes
Activation Date 08.02.2019
Next mySec... 08.05.2019

New mySecurity Renewal 08.05.2019  In 3 months In 6 months In 12 months



Press Set to activate mySecurity on the connected product. Press Deactivate to deactivate mySecurity on the connected product.
Please make sure that the product is connected to your computer and only disconnect once the activation is complete. Please use Internet Explorer for successful operation.

Set Deactivate

After pressing the "Report as Stolen" button, a warning will pop up to confirm that the device as stolen.

Please Confirm!  

Are you sure to report this product as stolen? If you report this product as stolen it will be locked once the mySecurity renewal date is reached.
Please note, that products reported as stolen can only be re-activated by your local Leica Geosystems representative.

OK Cancel

If accepted, instrument status changes to **Stolen!**.

General

	Product	TS07 3" R1000, total station
	My Reference	
	Serial No.	3301194
	Status	Stolen!

mySecurity

 mySecurity... : Yes
Activation Date 08.02.2019
Next mySec... 08.05.2019

After reporting as stolen, if the instrument is ever brought into an Authorized Leica Service Centre it will be known that it is stolen, and the local Authorities will be informed.

6. Locate stolen instrument

Once a stolen instrument was attempting to connect to myWorld, the IP address will be logged and used to locate the instrument.

The status changes from 'Stolen' to 'Located' and a new icon 'Show Location' becomes available:

General



Product: TS07 3" R1000, total station
My Reference:
Serial No.: 3301194
Status: **Located!**

Article No.:
Delivery Date:
Equipment No.:
Show Location

By selecting 'Show Location' button, a pop-up window will appear showing the date and time of the location as well as the IP address. The location will be shown on a map by pressing the link.



The location of the stolen instrument will be shown in a map:

