


Rugged Tablet

FZ-M1



CONNECTIVITY AND PERFORMANCE

- Intel™ Celeron™ N2807 Processor
- Windows™ 8.1 Professional
- Bluetooth™ and WiFi™

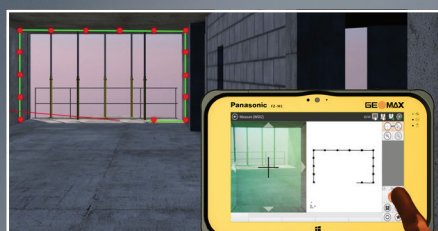

DESIGNED FOR FIELD PROFESSIONALS

- Compact & lightweight design
- High-visibility 7" display
- Dual front and rear camera



FULLY RUGGED

- 180 cm shock resistant
- Multi-touch screen
- Rain mode

FZ-M1

The tablet specially designed for field professionals like you - fully rugged to support the most severe weather conditions and equipped with a powerful processor, Windows™ 8.1 and Bluetooth™. The FZ-M1 will boost your performance not matter the challenge you face.

THE ULTIMATE OUTDOOR TABLET

Outdoor can hide nothing from this tablet. Its multi-touch and sunlight-viewable screen allows you to interact with it without even taking off your gloves. Its ergonomic and lightweight design naturally fits into your hands, and because accidents in the field can happen, FZ-M1 is also shock resistant and water and dust proof.

Resistant to challenging working conditions with extreme performance thanks to its flexible configurations, connectivity options and Windows™ 8.1 functionality that will take your efficiency to the next level.



SYSTEM

| | |
|---------------------------|--|
| Mobile computing platform | Intel Celeron™ N2807 processor 1,58 GHz 1MB L2 Cache |
| Operating system | Windows™ 8.1 Pro |
| RAM | 2 GB |
| Graphic chip | Intel® HD Graphics |

CAMERA

| | |
|-------|----------------------------------|
| Front | 2 MP |
| Rear | 5 M with autofocus and LED light |

DATA COMMUNICATION

| | |
|--------------|--|
| 4G LTE | Broadband Gobi 5000 |
| Bluetooth® | 4.0 + EDR Class 1 |
| WLAN | Intel® Dual Band Wireless - AC7260 |
| Sound | WAVE and MIDI playback, Intel® High Definition Audio subsystem support, internal microphone for webcam |
| Data storage | 128 GB SSD |

INTERFACE

| | |
|---------------|--|
| Display | 7" sunlight-viewable WXGA Active Matrix (TFT) IPS LCD with circular polarizer (up to 500cd/m2 brightness); multi-touchscreen |
| I/O Interface | USB 3.0; headset; port replicator connector; micro SD/SDHC memory card |

POWER SUPPLY

| | |
|----------------|---|
| AC Adapter | Input 100V - 240V AC, 50Hz/60Hz; Output 16V DC, 3.75A |
| Battery | Lithium-Ion (7.2V, 3320mAh) |
| Operating time | Up to 7 h |

PHYSICAL SPECIFICATIONS

| | |
|------------------|-------------------------------|
| Dimensions | 203 (W) x 18 (D) x 132 (H) mm |
| Weight | 540 g |
| Protection class | IP65* |
| Drop resistance | 180 cm** |

* One option exclusive possible in configuration port / business expansion module.

** Tested by an independent third party lab following ML-STD-810G and IEC 60529, Sections 13.4, 13.6.2, 14.2.5 and 14.3.



1215 - 843465 en
Copyright GeoMax AG.
Illustrations, descriptions and technical specifications are not binding and may change. All trademarks and trade names are those of their respective owners.
The Android robot is reproduced or modified from work created and shared by Google and used according to terms described in the Creative Commons Attribution 3.0 License.



At GeoMax, we provide a comprehensive portfolio of integrated solutions by developing, manufacturing and distributing quality construction and surveying instruments and software.

Our products are known for robustness, ease of use and outstanding price-to-performance ratio. From our base in Europe, our technology is supported by a broad sales and service network covering all continents and more than 100 branches.



Гост применим к геодезическому оборудованию и приборам.

GEOMAX AUTHORIZED DISTRIBUTION PARTNER

Works when you do